

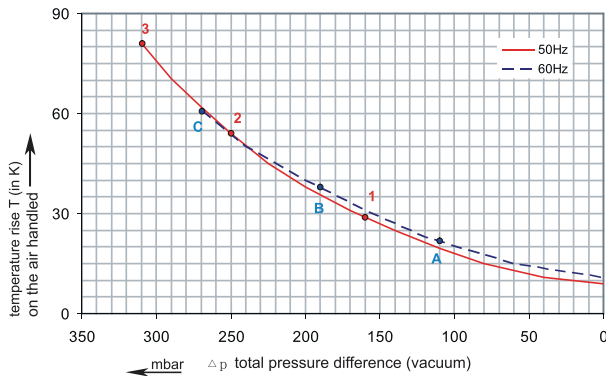


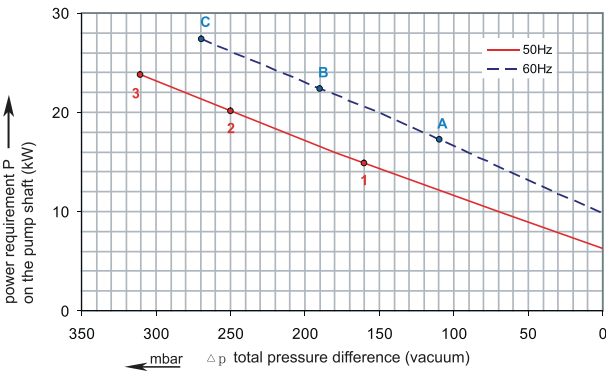




1RSCB 61-135

Performance curve for Vacuum pump

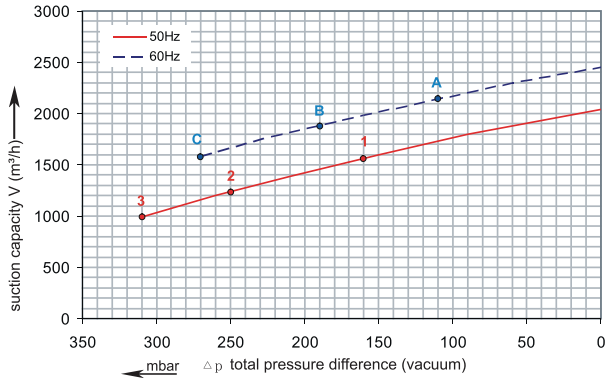

1RSCB 61-135

Performance curve for Compressor

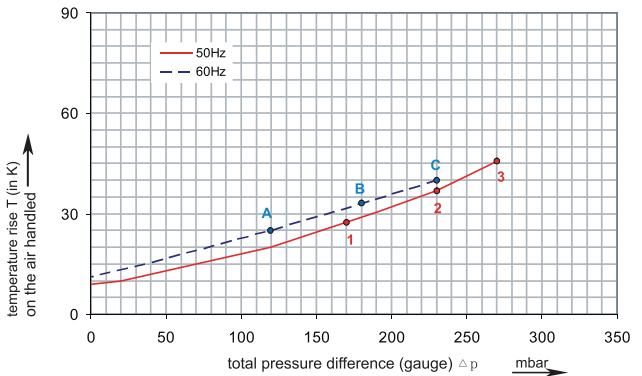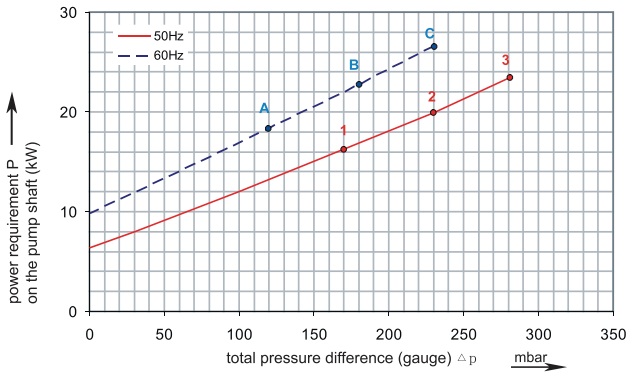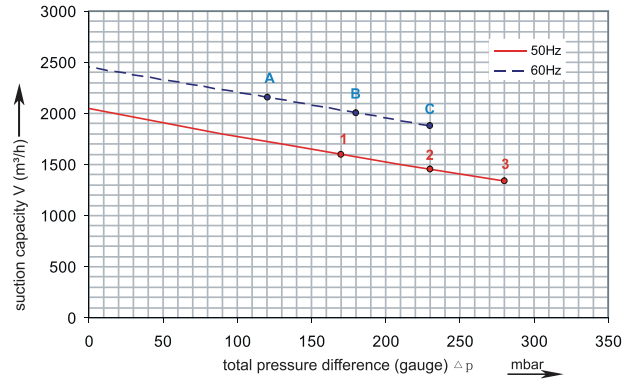

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C. For other conditions please confer with us.

Each RSC type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55






Madan Technologies
Maagan Michael
D. N. Menashe
3780500 Israel

Tel: +972-4-6243353
Fax: +972-4-6243366
sales@madantec.com
www.madantec.com

RENOVA

1RSCB 61-135

Curve No.	Model	Freq. (Hz)	Rated power (KW)	Voltage (V)	Current (A)	Sound Level [dB(A)]	Weight (Kg)
1	1RSCB61-135 15T	50	15.0	345-415Δ / 600-720Y	35.0Δ / 20.0Y	75	220
A	1RSCB61-135 15T	60	17.5	380-480Δ / 660-720Y	36.5Δ / 21.0Y	84	220
2	1RSCB61-135 20T	50	20.0	345-415Δ / 600-720Y	40.0Δ / 23.0Y	75	230
B	1RSCB61-135 20T	60	23.0	380-480Δ / 660-720Y	42.0Δ / 24.2Y	84	230
3	1RSCB61-135 25T	50	25.0	345-415Δ / 600-720Y	52.0Δ / 30.0Y	75	235
C	1RSCB61-135 25T	60	29.0	380-480Δ / 660-720Y	52.0Δ / 30.0Y	84	235

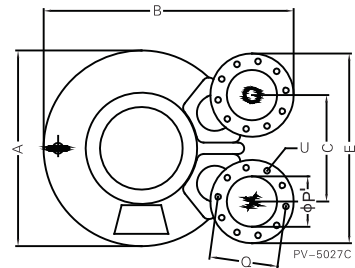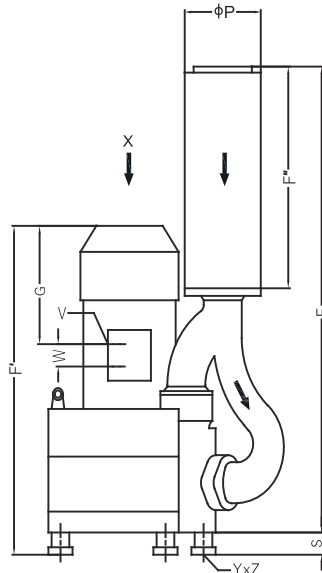

Model	A	B	C	D	E	F	G	ØP	ØP'	Q	S	U	V	YxZ
1RSCB61-135 15T	615	723	307	490	526	1201	291	219	135	201	58	M8x40	4xM40x1.5	M12x10.5
1RSCB61-135 20T	615	723	307	490	526	1201	291	219	135	201	58	M8x40	4xM40x1.5	M12x10.5
1RSCB61-135 25T	615	723	307	490	526	1201	291	219	135	201	58	M8x40	4xM40x1.5	M12x10.5