


Style 85World's Only Split Cartridge Seal

(US PATENT NO. 5662340)



for difficult installations

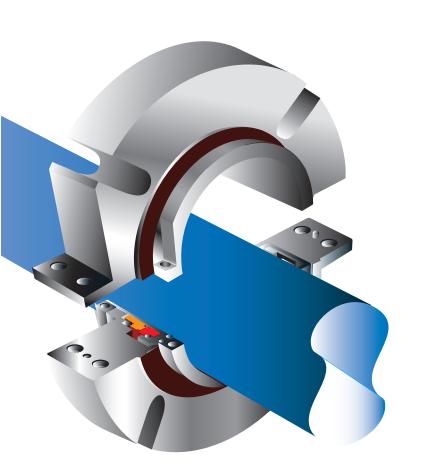



For Difficult Installations

Flex -A-Seal developed the Style 85 Split Cartridge Seal to provide the easiest installation found anywhere in the world. After simply attaching two halves over the shaft, the seal


No Measurements No Shims No Special Tools No Glue mounts to the equipment like any other cartridge seal. It does not get any easier than that! The Style 85 is the only split seal in the world in which




just two pieces are handled, eliminating the need to touch sensitive lapped faces. Both sealing faces are secured safely in cartridge halves and cannot be cocked, chipped or scarred.

The design of the Style 85 is like no other split seal on the market. While most split seals are mounted outside the stuffing box and designed to function like an outside seal, the







maintaining the ability to handle higher speeds, internal pressures and misalignment. No need to worry about solids, as the springs are protected and out of the product to eliminate clogging. The static shaft sleeve "o" ring is positioned outside of the stuffing box to assure a good sealing surface, even on worn packing sleeves!

centrifugal force to keep the solids away from the seal faces while



Unlike most cartridge seals on the market, the Style 85 is the only split cartridge seal that can be fully assembled and pressure tested at the factory. This ensures the sealing integrity of each seal completely before it is sent to the field.

The Flex-A-Seal Style 85 Split Cartridge Seal ...Fast, Simple and Reliable!





Materials of Construction

Stationary 316 Stainless Steel Gland Assembly Rotating 316 Stainless Steel Sleeve Assembly O Rings, Gaskets Viton (standard) consult factory for AFLAS® or Fluoraz® option Rotating Face Silicon Carbide Stationary Face Carbon or Silicon Carbide

Springs Hastelloy C® Screws 316 Stainless Steel

Registered Trademarks:


Viton® - Dupont Performance Elastomers Aflas® - Asahi Glass Co. Fluoraz® - Green Tweed


Hastelloy C® - Cabot Stellite Division

Operating Conditions

Seal Size 1 3/4" - 3" (45mm - 75mm) 3 1/8" - 3 3/4" (80mm - 95mm) 3 7/8" - 4 3/4" (100mm - 120mm) 5" and above (125mm and above)	Temp. 350°F (175°C) 350°F (175°C) 350°F (175°C) 350°F (175°C)	Speed 3600 RPM 1800 RPM 800 RPM 875 RPM	Pressure 250 PSI (17 bar) 200 PSI (14 bar) 150 PSI (10 bar) 100 PSI (7 bar)
5" and above (125mm and above)	350°F (175°C)	875 RPM	100 PSI (10 bar)

* Maximum temperature / pressure / speed indicates operating extremes independently and does not imply the seal will function at these extremes at the same time. Contact Flex-A-Seal Engineering if in doubt.

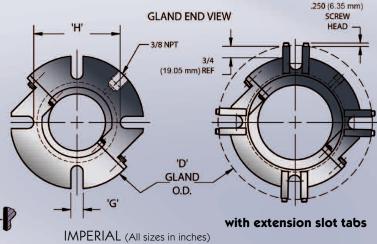



(+.000" -.002" or +.00 mm -.05 mm)

Size	A			D		F	G	Н	J	K	_L_
-24	1.500	.250	2.187	5.25	2.125	2.500	.562	3.125	2.250	2.625	.656
-27	1.687	.250	2.437	5.50	2.125	2.500	.562	3.375	2.500	2.875	.656
-28	1.750	.250	2.437	5.50	2.125	2.500	.562	3.375	2.500	2.875	.656
-30	1.875	.250	2.562	5.50	2.125	2.500	.562	3.344	2.625	3.000	.656
-31	1.937	.250	2.625	5.44	2.125	2.500	.562	3.563	2.687	3.125	.656
-32	2.000	.250	2.687	5.44	2.125	2.500	.562	3.563	2.750	3.125	.656
-34	2.125	.250	2.812	6.00	2.125	2.500	.687	3.688	2.875	3.375	.656
-35	2.188	.250	2.937	6.25	2.125	2.500	.687	3.813	3.000	3.375	.656
-36	2.250	.250	3.062	6.25	2.125	2.500	.687	3.937	3.125	3.500	.656
-38	2.375	.250	3.187	6.25	2.125	2.500	.687	4.062	3.250	3.500	.656
-39	2.438	.250	3.312	6.44	2.125	2.500	.687	4.125	3.375	3.625	.656
-40	2.500	.250	3.312	6.44	2.125	2.500	.687	4.125	3.375	3.625	.656
-42	2.625	.250	3.347	6.44	2.125	2.500	.687	4.438	3.500	3.875	.656
-43	2.688	.250	3.562	7.82	2.125	2.500	.687	4.438	3.625	4.125	.656
-44	2.750	.250	3.562			2.500			3.625		.656
-46			3.687					4.812			.656
-47	2.938	.250	3.812	7.88	2.125	2.500	.687	4.938	3.937	4.375	.656
-48	3.000	.250	3.812	7.88	2.125	2.500	.687	4.938	3.937	4.375	.656
-52	3.250	.281	4.188	8.25	2.437	2.812	.812	5.188	4.250	4.750	.812
-54	3.375	.281						5.313			.812
-55	3.438	.281						5.437			.812
-56	3.500		4.437					5.437			
-58	3.625	.281	4.562	8.63	2.437	2.812		5.562			.812
-60	3.750	.281				2.812		5.688			
-62	3.875	.281						5.813		5.250	.812
-64	4.000	.281						5.813			
-68	4.250							6.063			
-70	4.375	.281						6.437			.812
-72	4.500	.281				2.812		6.500			
-76	4.750							6.938			
-79	4.938									6.750	
-80	5.000						.937	7.312		6.750	.923
-82	5.125					3.812	.937			7.250	
-84	5.250							7.812			.923
-88								7.813			.923
								8.156			
								8.656			
								8.813			.923
400	0 750				0.050			0 0 4 0		0 005	000

-108 6.750 .375 7.938 12.50* 3.250 4.000 .937 9.312 8.062 8.625 .923 -112 7.000 .375 8.188 12.75* 3.250 4.000 .937 9.562 8.312 8.750 .923 -136 8.500 .375 9.688 14.25 3.250 4.000 1.00011.000 9.812 10.250 .923

METRIC (All sizes in mm)

Size	_A_	В	_ C	_D	_E	_F_	G	_ н_		K	
-30	45	6.35	65.1	140	54	64	14.3	84.9	66.68	76.20	16.7
-32	48	6.35	68.2	140	54	64	14.3	90.5	68.85	79.38	16.7
-32	50	6.35	68.2	140	54	64	14.3	90.5	68.85	79.38	16.7
-36	55	6.35	77.8	159	54	64	17.4	100.0	79.40	88.90	16.7
-40	60	6.35	84.1	165	54	64	17.4	104.8	85.73	95.25	16.7
-42	65	6.35	85.0	165	54	64	17.4	112.8	88.90	98.40	16.7
-44	70	6.35	90.5	197	54	64	17.4	112.8	92.08	104.77	16.7
-48	75	6.35	96.8	203	54	64	17.4	125.4	100.00	111.10	16.7
-52	80	7.14	106.4	210	62	72	20.6	131.8	108.00	120.65	20.6
-56	87	7.14	112.7	216	62	72	20.6	138.1	114.30	127.00	20.6
-58	90	7.14	115.9	219	62	72	20.6	141.3	117.50	130.20	20.6
-60	95	7.14	117.5	222	62	72	20.6	144.5	119.05	130.18	20.6
-64	100	7.14	125.4	224	62	72	20.6	147.6	127.00	136.52	20.6
-76	120	7.14	143.7	248	62	72	20.6	176.2	146.05	158.75	20.6
-80	125	9.50	157.2	273*	77.8	96.8	23.8	185.7	160.30	171.40	23.4

*Sizes use extension slot tabs

Additional sizes available upon request

Fast, Simple and Reliable

Split seals are designed for environments where conventional seals routinely take many hours to disassemble and reassemble rotary equipment, but the fully split cartridge seal design of the Flex-A-Seal Style 85 is easier to install than conventional seals and other component split seal designs, making this seal ideal for hard to access equipment such as:

- Pumps
- Mixers
- Agitators

The Style 85 is commonly used in many industries:

- Chemical Processing
- Food Processing
- Industrial
- Mining
- Pharmaceutical
- Power Generation
- Petrochemical
- Pulp and Paper
- Refining
- Water and Waste Treatment









Manufacturing and stocking centers

USA

1 Jackson Street PO Box 184 Essex Junction, VT 05453-0184 USA Phone: 1-800-426-3594 • 1-802-878-8307

Fax: 1-802-878-2479

Email:sales@flexaseal.com

BRAZIL

Rua Visconde De Taunay 59 Loja 06-CEP Bom Retiro, Sao Paulo Brazil CEP 01132-000

Phone: 55-11-3115-4819 • 55-11-3115-0656

Fax: 55-11-3101-1297

Email: vendas@flexaseal.com.br

AUSTRALIA

Unit 9/23 Richland Avenue Coopers Plains 4108 QLD Australia

Phone: (07) 3272 7030

Fax: (07) 3272 9885 Mob: 0417 626025

Email:flexasealoz@bigpond.com

DISTRIBUTED BY:

